



G - Track


TWO-WAY ROD

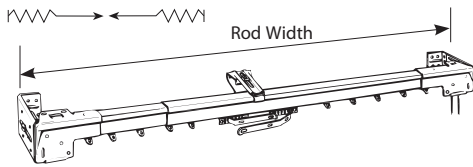


TWO-WAY DOUBLE ROD

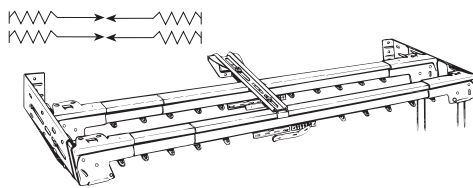

ONE-WAY LEFT ROD



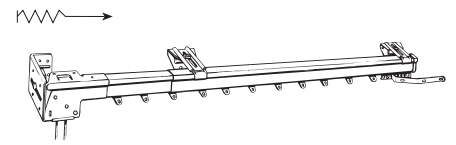


ONE-WAY RIGHT ROD

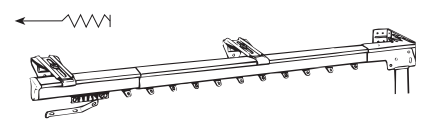


G-TRACK SPECIFICATIONS

- Adjustable
- Traverse rod sections made of .016" thickness steel, with cream color baked enamel finish
- Contour tapered profile allows draperies to hang neater and provides smooth operation on the longest extensions
- Rod edges are deburred and rounded for smooth traversing
- Pulley housings equipped with 4/64" polyethylene pulleys
- Traverse cord 3/64" polyester stretch-resistant braid
- Universal, positive cam-type support
- Ceiling or wall mount options




UNIVERSAL CAM-LOCK STIRRUP

- Interchangeable for inside or outside rod sections
- Locks securely with a twist of a screwdriver
 - (1) Open position - for inserting rod
 - (2) Closed position - for locking inside section
 - (3) Closed position - for locking outside section

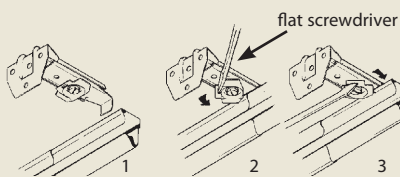

SLIDE GATE

- Gate returns to closed position automatically



G-TRACK ROD SIZES

ITEM TYPE	DESCRIPTION	METRIC	SLIDES	SUPPORTS REQUIRED
G-Track-1	30-48"	76-122 cm	10	0
G-Track-2	48-84"	122-213 cm	20	1
G-Track-3	66-120"	168-305 cm	30	2
G-Track-4	84-156"	213-396 cm	40	3
G-Track-5	120-228"	305-579 cm	60	4

FINISH: Cream color

G-TRACK ACCESSORIES




Slide




Universal Support




Support




Double Support




Bracket



Double Bracket



Cord Tension Pulley



Cord Guide

RECOMMENDED WEIGHT LIMITS FOR TRAVERSE RODS

Up to 84" - 1 lb. per foot ; with two or more center supports - 1 1/2 lbs. per foot
Over 84" - 1/2 lb. per foot ; with two or more center supports - 1 lbs. per foot