NightFall

KOPER

Product Certificate

Fire, Smoke Classification	FR (US) - NFPA 701 TM#1	BS (GB) - 5867 Part2 TypeB
	B1 (CN) - GB17591	B1 (DE) – DIN4102
Health & Safety	Oeko-tex Standard 100 class IV	Greenguard® Gold
	RoHS Directive (EU)2015/863	EN71 Part 3:1994
	AATCC112-2014	GB18586 - 2001
Colour fastness to light	≥Grade 8 ISO105 B02:2014	
	≥4.0 AATCC TM 16.3-2014; Option 3; Xenon Arc Lamp	
Warranty	5 Years	

Technical Data

STYLE		NightFall			
Composition		24% Polyester – 76% PVC	Mechanical Resistance		
Openness Factor		0%	Breaking	Warp	≥2250 N/5cm
UV Screen		Approximately 100%	(ISO 13934–1)	Weft	≥1830 N/5cm
Width	Inch	98" – 118"	Tear	Warp	≥130 N
	cm	250 – 300	(ISO 4674)	Weft	≥100 N
Weight	oz/yd2	18.57±5%	Packing		32.8 yards
(ISO 2286–2)	g/m²	630 ± 5%	(Roll Length)		30 lm
Thickness	Inch	0.028 ± 5%			
(ISO 2286–3)	mm	0.70 ± 5%			

Care & Cleaning

✧   Remove dust with vacuum cleaner or compressed air.

✧   Handle the fabric with care (clean and dry hands, or use of gloves).

✧   Do not scrub, use a plant-based eraser to remove superfcial stains.

✧   Do not use solvents or any abrasive substance that might damage the face of fabric.

✧   All types of chemicals will cause permanent damage to the fabric. Therefore, if cleaning windows etc.,the blind will have to be raised to avoid any direct or indirect spray or splatter of chemicals on the fabric.

Colours
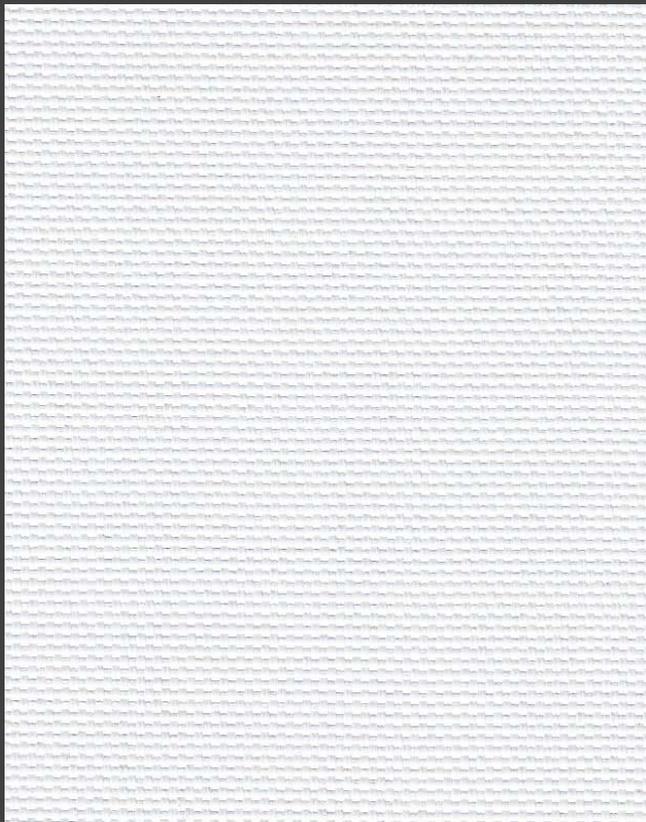
NF0101 White/White

NF0102 White/Sand

NF0105 White/Grey

NF0505 Grey/Grey

* Colours may be slightly different from the actural ones