




EXTERIOR
WINDOW COVERING


KOPER_K

EXTERIOR SERIES


STYLE 909

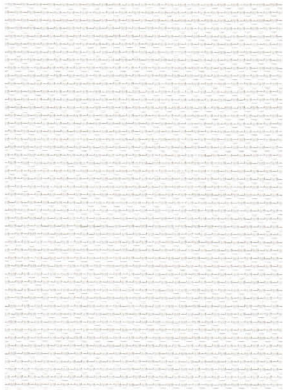


101

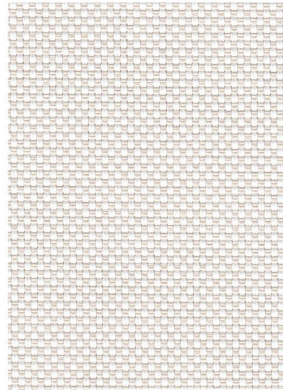

121

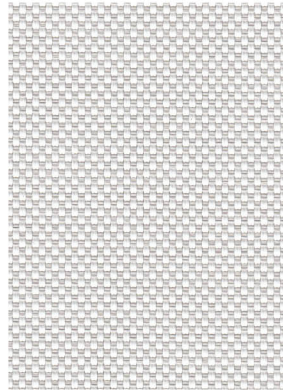

120

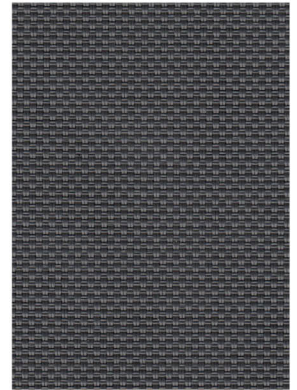

1010

OPENNESS 1%

EXTERIOR SERIES TECHNICAL SPECIFICATION STYLE 909


| | | | | | |
|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|---|---|
| Openness | 1% | 5% | 10% | Composition | 20% Polyester, 80% PVC |
| Weight ISO 2286-2 | 690 gr/m ² ±5% | 620 gr/m ² ±5% | 560 gr/m ² ±5% | Width | 200. 250. 300 cm |
| Thickness ISO 2286-3 | 0.85 mm ±5% | 0.80 mm ±5% | 0.76 mm ±5% | Pattern | Basket Weave 2 x 2 |
| Yarn Count ISO 7211/2 | Warp 38/inch ±5% Weft 34/inch ±5% | Warp 35/inch ±5% Weft 32/inch ±5% | Warp 31/inch ±5% Weft 30/inch ±5% | Fire Retardancy | FR (USA) - NFPA 701 - 2010 B1 (DE) - DIN4102 - 1 |
| Breaking Strength ISO 1421 | Warp 250 daN/5cm Weft 215 daN/5cm | Warp 220 daN/5cm Weft 190 daN/5cm | Warp 200 daN/5cm Weft 209 daN/5cm | Color Fastness to Light ISO 105:B04 | 8 |
| Tear Strength ISO 4674 | Warp 12 daN Weft 10 daN | Warp 14 daN Weft 11 daN | Warp 14 daN Weft 14 daN | Mould Resistance ISO 846 | A |

CERTIFICATION



EXTERIOR SERIES

STYLE 912

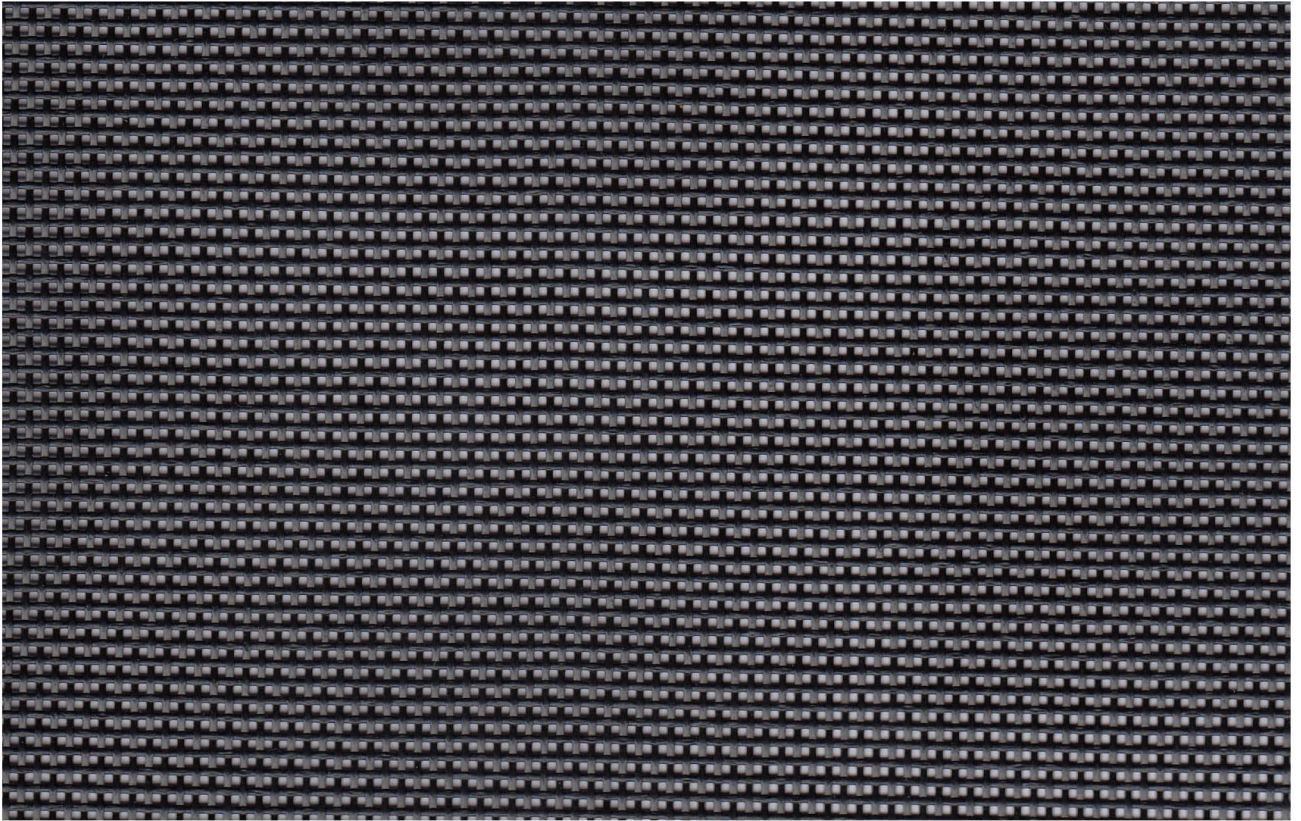

090

OPENNESS 20%

EXTERIOR SERIES TECHNICAL SPECIFICATION STYLE 912

| | | | | | |
|----------------------------|---|---|--------------------------------------|------------------------------------|------------------------------------|
| Composition | 30% Polyester, 70% PVC | Thickness ISO 2286-3 | 0.73 mm ±5% | Yarn Count ISO 7211/2 | Warp 15±5%/inch Weft 14±5%/inch |
| Openness | 20% | Breaking Strength ISO 1421 | Warp 212 daN/5cm Weft 180 daN/5cm | Weight ISO 2286-2 | 450 gr/m ² ±5% |
| Width | 200, 250, 300 cm | Tear Strength ISO 4674 | Warp 26 daN Weft 23 daN | Mould Resistance ISO 846 | A |
| Pattern | Basket Weave 1x1 | Color Fastness to Light ISO 105:B04 | 8 | Antimicrobial | ASTM E 2180 |
| Fire Classification | FR (USA) - NFPA 701 - 2010 B1 (DE) - DIN4102 - 1 | | | | |

CERTIFICATION



EXTERIOR

WINDOW COVERING

OUR PRODUCT BENEFITS

Enjoy Great View Out & Protecting Your Privacy

Our screens allow you to have full visibility in the room on what is happening outside while at the same time preventing others from infringing your privacy.

Our screens also allow the light breeze into the room, keeping you cool and comfortable.

Slower Fading & Prolong Furnishing Life Span

Our UV resistant screens prevent the furnishings from fading fast as the screens prevent direct sunlight from overheating the furnishings and thus prolonging the life span of your furnishings.

Lower Room Temperature & Reduce Energy Costs

Our screens reflect the heat transmitted through the windows, therefore keeping the room cooler. This will turn reduce energy costs and thus you are doing your part in saving our environment.

Greater Visual Comfort & Protection from UV Light

Our screens help to should out the glare notably and protect you from the harmful ultraviolet rays.

Certifications:

